

BOS/ BO/ BI Series

Interactive Floor Display



Features


High Strength Performance

· Loading capacity over 2000kg/sqm.



Water-proof design

· Ip65 for Indoor and outdoor LED floor panel.

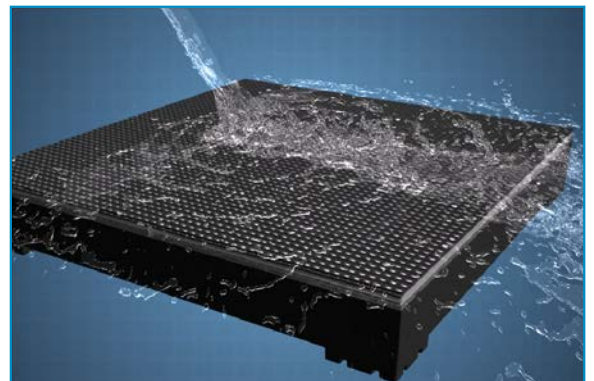

Interactive Effect (multi-point touch)

- Each module has 16 built-in sensors, it reduces response time to less than 0.01s.



Fast Maintenance



1. Use tools to install and remove cabinets.



2. Remove the position of screws as shown.



3. Use slot type screwdriver inserted into the gap between the modules.



4. Disconnect the ribbon cable and remove the module.

Parameter

Model	BO/BI				BOS	
Typology	Outdoor /Indoor				Outdoor	
Pixel Pitch (mm)	2.6	5.2	6.25	8.9	5.2	6.25
LED Configuration	SMD1515	SMD1921/1010	SMD2727/2020	SMD3535	SMD1921	SMD2727
Brightness (cd/m)	1000	3500 1000	4000 1000	4000 1000	4000	4000
Module Size (W x H mm)	250x250	250x250	250x250	250x250	250x250	250x250
Module Resolution	96x96	48x48	40x40	28x28	48x48	40x40
Cabinet Size (W x H x T mm)	500x500x82	500x500x82	500x500x82	500x500x82	500x500x82	500x500x82
Cabinet Resolution	192x192	96x96	80x80	56x56	96x96	80x80
Cabinet Weight (kg/pcs)	13	13	13	13	13	13
Power Consumption (Max/Avg W/pcs)	240/80	240/80	240/80	240/80	240/80	240/80
Refresh Rate (Hz)	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840	1920/3840
Gray Scale (Bit)	14	14	14	14	14	16
Viewing Angle (H/V)	120°/ 120°	120°/ 120°	120°/ 120°	120°/ 120°	120°/ 120°	120°/ 120°
IP Rating (Front/Rear)	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54
Interactive Induction					YES	YES
Response Time					30ms	30ms
Touch Point						

Emea Exclusive Importer

AMF

Advanced Multimedia .Fr
Tel: + 33 778 56 04 41
Mail: amf63@me.com
www.amfledisplay.com
Address: 126 Chemin de la Cavée
78630 Orgeval, France