

# NIC Series

## Flexible LED Display



## Features


**Flexible module , max bending angle  $\pm 30^\circ$**

- Indoor curved screen, minimum pixel pitch 2.6mm.
- Minimum arc diameter 0.95m.



## Customize LED screen shape

- NIC LED module can be made into various shapes such as Column screen, Reception desk screen, step screen etc.

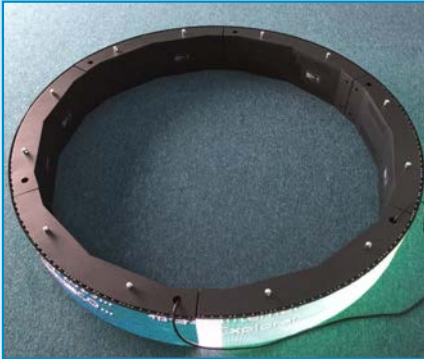

## Easy maintenance

- The LED modules, PSU, cables can be replaced independently.
- Indoor curved screen, minimum pixel pitch 2.6mm.
- Minimum arc diameter 0.95m.



## Parameter

Typology	Indoor				
Pixel Pitch (mm)	2.6	3.1	3.9	4.8	6.25
LED Configuration	SMD2020				
Brightness (cd/m)	≥ 1000				
Module Size (W x H mm)	250x125				
Module Resolution	96x48	80x40	64x32	52x26	40x20
Minimum Diameter (mm)	955				
Cabinet Weight (kg/pcs)	35				
Power Consumption (Max/Avg W/m <sup>2</sup> )	600/200				
Refresh Rate (Hz)	1920/3840				
Gray Scale (Bit)	≥ 14				
Viewing Angle (H/V)	140° / 140°				
IP Rating (Front/Rear)	IP30/IP30				

Emea Exclusive Importer

**AMF**

Advanced Multimedia .Fr  
 Tel: + 33 778 56 04 41  
 Mail: amf63@me.com  
 www.amfledisplay.com  
 Address: 126 Chemin de la Cavée  
 78630 Orgeval, France